

RAMCRETE

STATIC CONCRETE PUMPS

www.ramcrete.co.uk

01628 782 860



Technical data Schwing SP2800E


| | |
|----------------------------|-----------------------------------------------------------------|
| Delivery Cylinder | 200mm |
| Delivery Stroke | 1600mm |
| Output | Max 63 / 109 m3/hr |
| Delivery pressure | 108* / 60 bar |
| Strokes per minute | 21* / 36 |
| Engine Power | 158 kW |
| Weight | 5700 kG |
| Pressure connection | 5.5 inch |
| Pump Length | 6000mm |
| Pump Width | 2200mm |
| Pump Height | 2500mm |
| Power requirements | 243 amp at full load. 486 amp at start up. 349.3 KVA |

*= Piston side

Hirer to provide electric supply and cables and note power requirements above. Pump must be hard wired to the power source.

Ramcrete pumping services Ltd, Potters yard, Drift rd. Maidenhead SL6 3ST Email:
admin@ramcrete.co.uk

Electric Supply

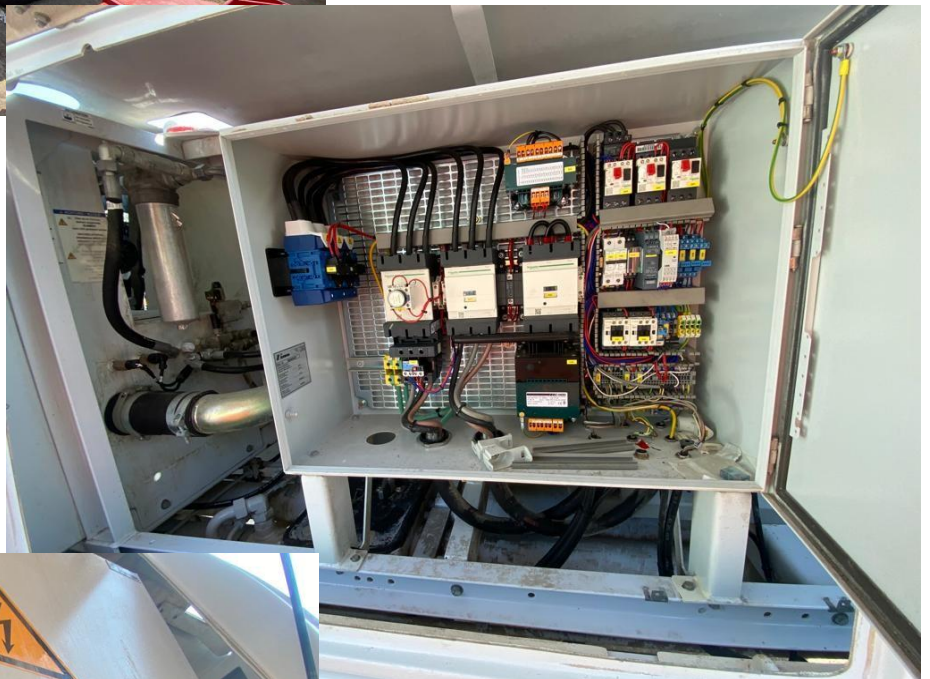

Ramcrete pumping services Ltd, Potters yard, Drift rd. Maidenhead SL6 3ST Email: admin@ramcrete.co.uk